

N45 ENT

104 kW (141 HP) @ 2200 rpm - 608 Nm @ 1600 rpm
Stage IIIA / Tier 3

SPECIFICATIONS

Technical code	F4HE9484A*J1XX	
Thermodynamic cycle	Diesel 4 stroke	
Air intake	TAA	
Arrangement	4L	
Bore x Stroke	mm	104 x 132
Total displacement	L	4.5
N° valves per cylinder	4	
Cooling	liquid	
Direction of rotation (seen from flywheel side)	CCW	
Compression ratio	17.5 : 1	
Rotation mass moment of inertia (without flywheel)	kgm ²	0.19
Standard flywheel inertia	kgm ²	0.708

FUEL SYSTEM

Injection system	Electronic Common Rail	
Injection pressure	kPa(bar)	145,000 (1,450)
Gas oil max intake temperature	°C	70 (at 25°C amb.)

AIR INTAKE

Max suggested intake restriction with clean air filter	kPa(bar)	3.5 (0.035)
Max suggested intake restriction with dirty air filter	kPa(bar)	4.5 (0.045)
Air flow at 100% load / rated speed	kg/h	517 (404)
Turbocharging pressure at full load/rated speed	kPa(bar)	145 (1.4)
Maximum supercharging air temperature (compressor outlet)	°C	200
Maximum air temperature increase between ambient and intercooler outlet	°C	25
Heat rejected to intercooler at maximum power	kJ/s(kcal/h)	15.5 (13,285)
Intercooler system max pressure drop	kPa(bar)	12 (0.12)

EXHAUST SYSTEM

Max allowable backpressure	kPa(bar)	10 (0.1)
Max exhaust temperature at full load/rated speed	°C	526
Exhaust flow at max output	kg/h	540

N45 ENT

104 kW (141 HP) @ 2200 rpm - 608 Nm @ 1600 rpm

Stage IIIA / Tier 3

LUBRICATION SYSTEM

Minimum oil pressure at idle	kPa(bar)	70 (0.7)
Max oil pressure at idle	kPa(bar)	350 (3.5)
Max oil temperature at full load/rated speed	°C	140
Engine angularity limits continuous operation:		
max front up and front down	0/360°	35°
max left hand and right hand	0/360°	35°
Total system capacity including pipes, filters, etc.	L	12.8


COOLING SYSTEM

Coolant capacity (engine only)	L	8.5
Water pump flow at rated speed	m³/h	11.3
Heat to reject by heat exchanger at max power	kJ/s(kcal/h)	56.3 (48,253)
Thermostatic valve (adjustment range)	°C	83 ÷ 99
Cooling liquid max temperature	°C	106
Min/max inner pressure in the cooling circuit	kPa(bar)	30/275 (0.3/2.75)
External cooling system max pressure drop	kPa(bar)	35 (0.35)

ELECTRICAL SYSTEM

Voltage	V	24
---------	---	----

Dimensions

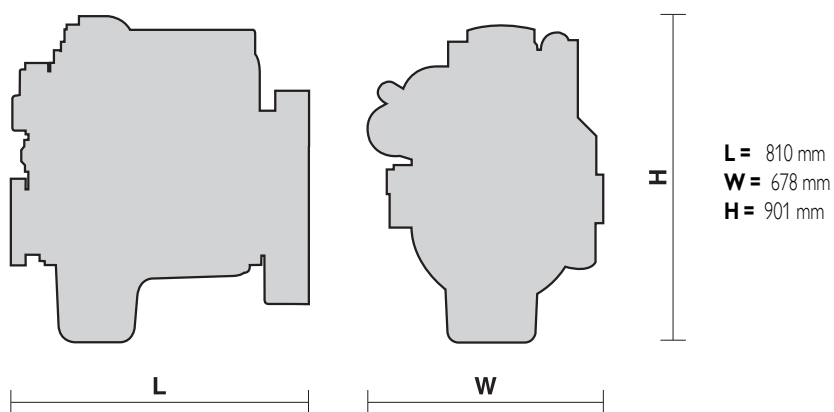

N45 ENT

104 kW (141 HP) @ 2200 rpm - 608 Nm @ 1600 rpm

Stage IIIA / Tier 3

PERFORMANCE



Rated power [*]	kW(HP)	104 (141)
At speed	rpm	2200
Peak power	kW(HP)	104 (141)
At speed	rpm	2200
Peak torque	Nm(kgm)	608 (62)
At speed	rpm	1600
Maximum no load governed speed at max rating	rpm	2375
Minimum idling speed	rpm	800
Mean piston speed at rated speed	m/s	10.1
BMEP at max torque	bar	17.38
Available certifications	CE 97/68 Stage IIIA - EPA Tier 3	
Specific fuel consumption at full load (best value)	g/kWh	211 @ 1500
Oil consumption at max rating	% fuel cons.	0.1%
Rumore alla potenza massima (ISO 3744)	dBA	91
Minimum starting temperature without auxiliaries	°C	-15
Oil and oil filter maintenance interval for replacement [**]	h	600
Dry weight (standard configuration without: oil, cooling, starter, clutch, Compressor A/C, alternator)	kg	410

FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE FPT SALES NETWORK.

[*] Power at flywheel according to 97/68 EC (without fan), after 50 hours running, 3% tolerance, Fuel Diesel EN 560.

[**] Oil type: Approved engine oil specification: 15W-40 ACEA E7 / API CI-4 or 10W-30 ACEA E7 / API CI-4 (ambient temperature below - 15°C). 10W-40 ACEA E9/API CJ-4 as alternative.

Test conditions: ISO 3046/1, 25 °C air temperature, 100 kPa atmospheric pressure, 30 % relative humidity - Applicable also to DIN 6271, BS 5514, SAE J1349 Standards.

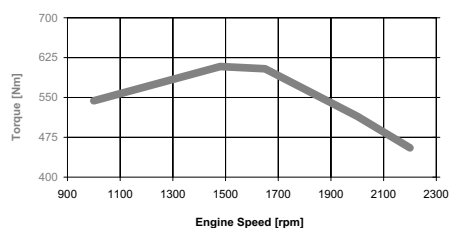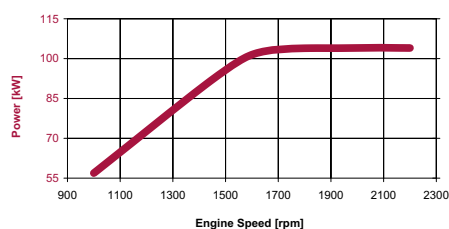

N45 ENT

104 kW (141 HP) @ 2200 rpm - 608 Nm @ 1600 rpm

Stage IIIA / Tier 3

STANDARD CONFIGURATION

Flywheel housing	type	SAE 3 - cast iron
Flywheel size	inch.	11" 1/2
Intake manifold location		top / left side / vertical upwards
Exhaust manifold location		meddle high / right side / front
Turbocharger		Fixed Geometry with Waste Gate valve
Turbocharger location		middle high / back / right side
Fan transmission ratio		1.4 : 1
Distance between fan - crankshaft centers	mm	x = 0 ; y = 296
Fuel filter	n°	single cartridge - left side
Fuel prefilter		supplied loose
Fuel pump		mechanical - incorporated in high pressure pump
Oil filter	n°	single cartridge - right side
Oil sump		suspended sheet steel / front sump, 35° angularity limits continuous in all directions
Oil vapours blow-by circuit		on flywheel housing, Mann & Hummel valve
Oil heat exchanger		integrated into the block
Oil filler		on valve cover
Exhaust counter flange		included
Starter		24V - 4kW
Alternator		24V - 70A with W contact
Engine stop device		incorporated in the pump
Wiring harness		-
Painting	color	grey

NOT INCLUDED IN THE STANDARD CONFIGURATION

Power take off - transmission ratio		1.03 : 1
PTO maximum available torque	SAE A	100Nm (9 teeth) - 150Nm (11 teeth)
	SAE B	240Nm (13 teeth)
Battery - minimum capacity recommended		130Ah (24V)
Battery - minimum cold cranking capacity recommended		500A (24V)

FPT OFFERS THE WIDEST AVAILABILITY OF ENGINE BUILD OPTIONS TO CUSTOMER SPECIFIC REQUIREMENTS WITHIN THE ENGINE SUPPLY.
TO FIND OUT MORE ABOUT THE CONFIGURATIONS AND ACCESSORIES WHICH ARE AVAILABLE, CONTACT THE FPT SALES NETWORK.

